

# MODEL VA

## INDUSTRIAL CHAIN GATES


Our Model VA provides an alternative option to secure your warehouse/storage area; providing visibility, air flow, and security.

### FEATURES INCLUDE:

- Perfect for low to minimal headroom conditions
- Durable aluminum top track and rollers allow for easy maneuverability
- Zinc plated gate body makes it perfect for corrosive environments
- Optional extended bracket and header support system – Makes it easy to install behind roll up doors
- Up to 24' wide and 12' high

### COMMON APPLICATIONS:


- Warehouses
- Loading Docks
- Storage Buildings

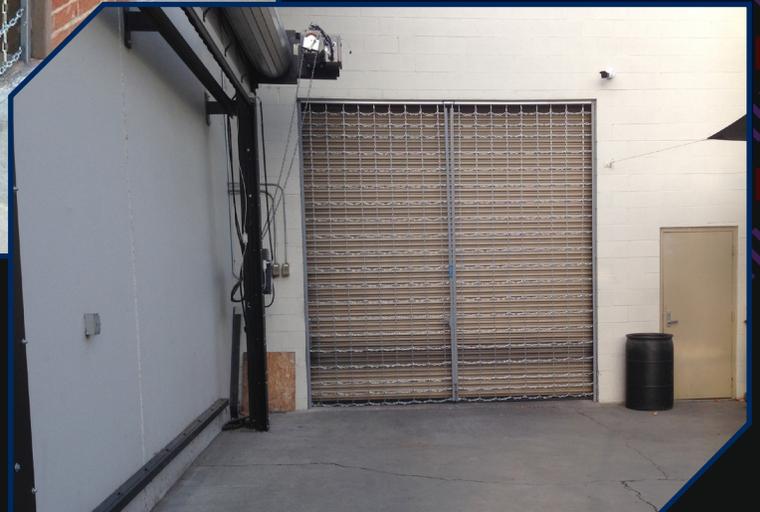


SPECIFICATIONS

<b>MAXIMUM SIZE</b>	24 ft. wide, 12 ft. high
<b>MOUNTING</b>	Face mount (above the header) or between-jamb mount (below the header)
<b>GATE BODY</b>	Square pattern from vertical and horizontal rows of 2/0 link chain, 3/16" thick, on 8" approximate centers (bottom 2 rows are on 4" horizontal centers); body is attached to lead and rear bars with steel rivet hooks; top of gate is fitted with rollers
<b>LEAD &amp; REAR BARS</b>	Steel angles
<b>TOP TRACK</b>	Extruded aluminum, 1 3/4" x 1 5/8" x 1/8" thick with connection plate/pins at each splice
<b>TOP ROLLERS</b>	Non-metallic 1 1/8" double-wheeled ball bearing rollers attached to top of gate body and lead bar to slide through top track
<b>OPERATION</b>	Manual operation
<b>LOCKING</b>	Cast ductile iron housing on lead bar with integral self-latching handle suitable for padlocking, spring loaded push pin on bi-parting gates
<b>FINISH</b>	Zinc plated gate body with gray color prime paint finish on other steel and iron parts, clear anodized top track
<b>WARRANTY</b>	One year limited warranty (excluding finish)


FEATURES



Extruded Aluminum Top Track



Self Latching Locking Device




Spring Loaded Push Pin


OPTIONS

- Powder Coat Finish Hardware
- Galvanized Finish Hardware
- Mesh or Vinyl Privacy Curtain

GATE DETAILS

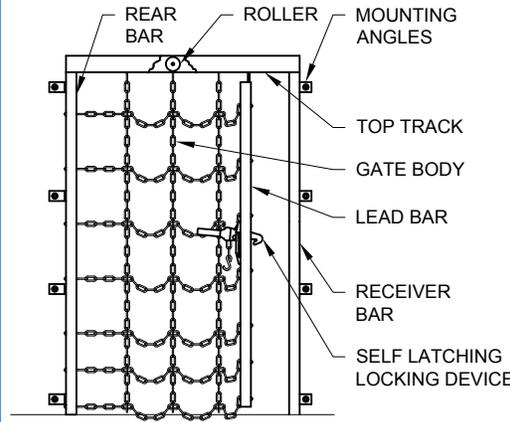


Single

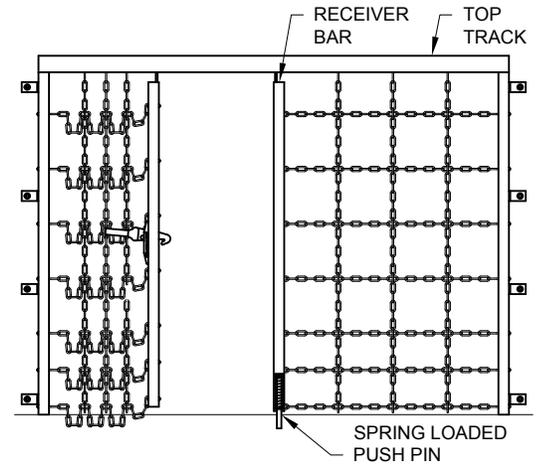


Bi-Parting

JAMB DETAILS

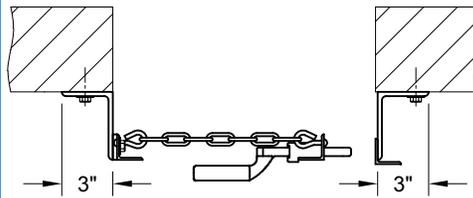


Face Mount




Between-Jamb Mount

CLEARANCES:  
Allow approximately 1" per ft. of gate width for stacking clearance.


HEAD DETAILS



Below Header Mount



Face Mount Standard Angle Bracket

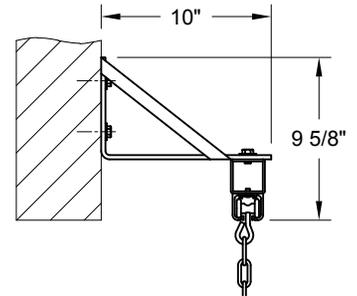

Face Mount Extended Angle Bracket (Optional for mounting behind roll-up door up to 14' wide)