



Parts Center

MODEL CG

COUNTER GRILLE

— C-SERIES —

Our CG Counter Grilles combine the compact design and finished look of a counter service door, but with ventilation and visibility of a grille for use on service counters and small entry openings.

FEATURES INCLUDE:

- Lawrence Compact CL-9 link design
- Approximate open area of 83%
- Lever activated double throw-bolt with mortise thumb turn or cylinder lock standard
- Multiple finish options available (Clear anodized, bronze anodized, and stainless steel)
- Up to 20,000 operating cycle

COMMON APPLICATIONS:

- Cafeterias
- Pharmacies
- Schools/Universities




LAWRENCE
DOORS

MADE IN THE USA
SINCE 1925


SPECIFICATIONS

MAXIMUM SIZE	20 ft. wide, 8 ft. high, 100 sq. ft.
CURTAIN	CL9 compact link pattern with 5/16" horizontal aluminum rods on 2" centers, vertical chains formed from single 1/8" aluminum 2-hole links on 9" centers, aluminum spacer tubes between links on every 6th rod, retaining rings on ends of rods
BOTTOM BAR	Rectangular aluminum extrusion
GUIDES	Aluminum extrusions with polyester pile wear strip, field adjustable lock bar heights
BARREL	4 1/2" min. steel pipe and solid steel shaft with sealed bearing and torsion spring(s) designed for 10,000 operating cycles
BRACKETS	3/16" steel plates with sealed bearing on operator side and external tension adjustment wheel
HOOD	20 gauge aluminum
OPERATION	Push-up to 14 ft. wide, awning crank on larger sizes
LOCKS	Single cylinder or guarded thumb-turn on coil side or opposite coil side of bottom bar to activate double throw-bolt lock
FINISH	Mill finish aluminum curtain, clear anodized aluminum bottom bar, guides and hood, shop painted black primer on steel brackets
WARRANTY	One year limited warranty (excluding finish)

COMMON OPTIONS




CL6 Pattern




CL4 Pattern

CURTAIN & BOTTOM BAR DETAILS




CL9 Compact Link Curtain*




Aluminum Bottom Bar

GUIDE DETAILS




Face Mount



Between Jamb Mount

CLEARANCES (typical face mount grille shown)

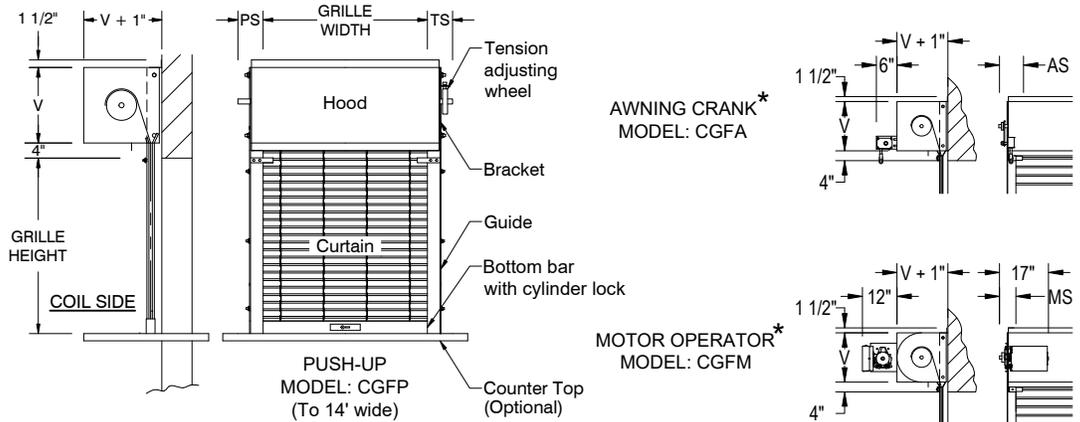

PS	AS	MS	TS	TM
5"	5"	5"	5"	5"

Add 3/4" for face of wall mount to masonry jambs.
 For between jamb mount, deduct 1/4" from dimensions.
 *V for grilles to 4 ft. high is 12"
 *V for grilles over 4 ft. high is 15"

GENERAL NOTES:

Clearances are based upon standard door construction. Reduced clearances may be available. Some options may require additional clearance. Drive side shaft may need to be field cut to fit in clearances shown. Shop drawings for specific applications are available. Consult factory for any information not shown.

*Available as an option

OTHER OPTIONS

- Vinyl bottom seal
- Guide bottom caps
- Cylinder locks on coil side and opposite coil side
- Stainless steel curtain and hood
- Clear, bronze, or color anodized finishes
- Powder coat finish (bottom bar, guides & hood)